




**F2-S32 M4**




**F2-S32 M5**




**F2-S32 M6**



**F2-S32 M8**



**F2-S32 M10**




## Description


bigHead fastener with an internally threaded collar fixing welded to a sighted 32 x 32 mm square perforated Head. Suitable for surface bonding applications requiring:

- A connection point on the reverse side of the material, for through-material installation of secondary fastening elements
- Thread engagement greater than typically achievable with 0.8d and 1.0d internally threaded fixings


## Key features



Sighted Head



Perforated Head design





Shouldered collar geometry



Carbon steel construction, bright zinc plate finish

## Intended usage



*Alternative configurations may be possible using this product.*

*Please contact bigHead for further advice.*


Surface bonding, open reverse socket

## Fastening functionality


Provides an internally threaded connection point for assembling threaded screws and similar secondary fasteners into.



**Torque tightening & preload during assembly:** these products require specific consideration, please see torque & preload guidance section.

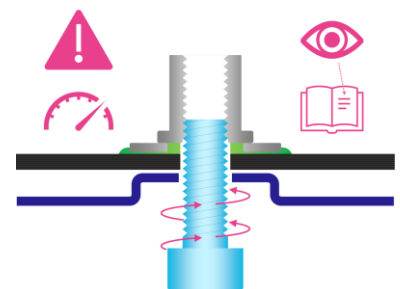

**Nominal dimensions (mm)**

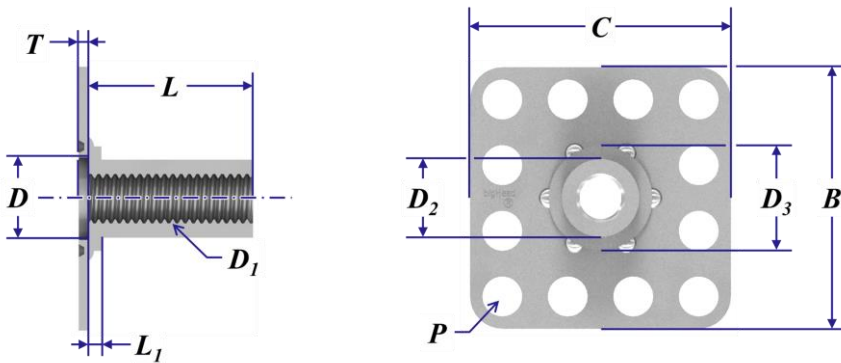

Product code	D1	D2 (Ø)	D3 (Ø)	D (Ø)	L	L1	T	B	C	Typical min. weight (g)
F2 S32 M4	M4 x 0.70	6.3	10.0	7	Nominal thread length value	1.6	1.2	32	32	10
F2 S32 M5	M5 x 0.80	9.5	12.7	10		1.6	1.2	32	32	12
F2 S32 M6	M6 x 1.00	9.5	12.7	10		1.6	1.2	32	32	12
F2 S32 M8	M8 x 1.25	11.0	16.0	10		1.6	1.2	32	32	14
F2 S32 M10	M10 x 1.50	12.7	16.0	13		1.6	1.2	32	32	12

**Common to all:**

Thread class: 6H post finish

P - 12 perforation holes, equally spaced square array

**Design & application guidance**

Thread size	Tightening torque				Loadability (Fixing)	Loadability (Weld)	Clearance holes
	Max. tightening torque (Nm)				Max. tensile load (kN)	Max. tensile load (kN)	Max. recommended hole size (mm)
	Friction coefficient:						
	0.08	0.10	0.12	0.14			
M4	0.8	1.0	1.1	1.2	4.9	Contact bigHead	4.5
M5	1.7	1.9	2.2	2.4	9.7	Contact bigHead	5.5
M6	2.8	3.3	3.7	4.1	9.6	Contact bigHead	6.6
M8	6.9	8.0	9.1	10.1	8.2	Contact bigHead	9.0
M10	13.6	16.1	18.3	20.3	13.5	Contact bigHead	11.0

*Based on VDI 2230, 90% utilisation of yield strength. Valid only for intended usage configuration.*

*Applicability depends on the assembly system friction coefficient, which may vary according to the secondary fastener(s) specification.*

*For guidance only, determination of correct assembly parameters may require specialist expertise.*

*Always conduct suitable torque/preload calculation and appropriate validation for the intended assembly design.*

**Fixing load limit (FLL):**

*To avoid failure of the bigHead fastener, do not exceed stated loadability limits during in-service mechanical loading or assembly preloading.*

**Weld load limit (WLL):**

*bigHead is not liable for failures arising from excessive tensile loading or assembly preloading of their products.*

**ISO 273 "medium" clearance hole basis.**

**Please contact bigHead for further guidance if you are unsure about these topics.**

## Disclaimer

---

The information within this document is for guidance purposes only and does not constitute a guarantee or warranty of any kind.

bigHead cannot accept liability for performance arising from use of these products.

Always perform appropriate testing and evaluation to determine application suitability.

Illustrations and diagrams are for illustrative purposes only and may differ from actual products.

## Further information & contact details

---

For further information about these products, or for technical support inquiries, please contact us:

[www.bighead.co.uk/the-techub/](http://www.bighead.co.uk/the-techub/)

Tech@bighead.co.uk

+44 (0)1202 583 696

**bigHead Bonding Fasteners Ltd**

Unit 1, Black Moor Business Park

36A Black Moor Road

Ebblake Industrial Estate

Verwood

Dorset

United Kingdom

BH31 6BB