

**M1-B15 M4 HT**



**M1-B15 M5 HT**



**M1-B15 M6 HT**



**Description**


bigHead fastener with an externally threaded stud fixing welded to a 15 x 15 mm square perforated Head. Suitable for embedding and surface bonding applications requiring the following:

- Embedment into materials with overall or localised section thickness of around 3 mm or greater
- Surface bonding onto or through components, with minimal standoff/ clearance height

**Key features**




As-rolled thread end-form



Shoulder diameter to suit ISO 273 clearance holes



Perforated head design



Minimised thickness/ stand-off height



Carbon steel construction, bright zinc plate finish

**Intended usage**




Embedding, flush stud



Embedding, inset stud



Surface bonding, blind stud




Surface bonding, through stud

*Alternative configurations may be possible using this product.*


*Please contact bigHead for further advice.*

**Fastening functionality**


Provides an externally threaded connection point for assembling threaded nuts and similar secondary fasteners onto.



**Torque tightening & preload during assembly:** these products require specific consideration, please see torque & preload guidance section.

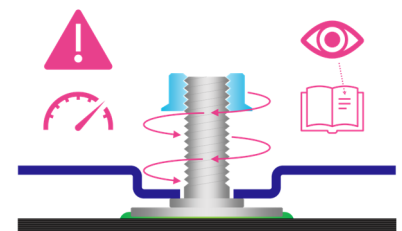

**Nominal dimensions (mm)**

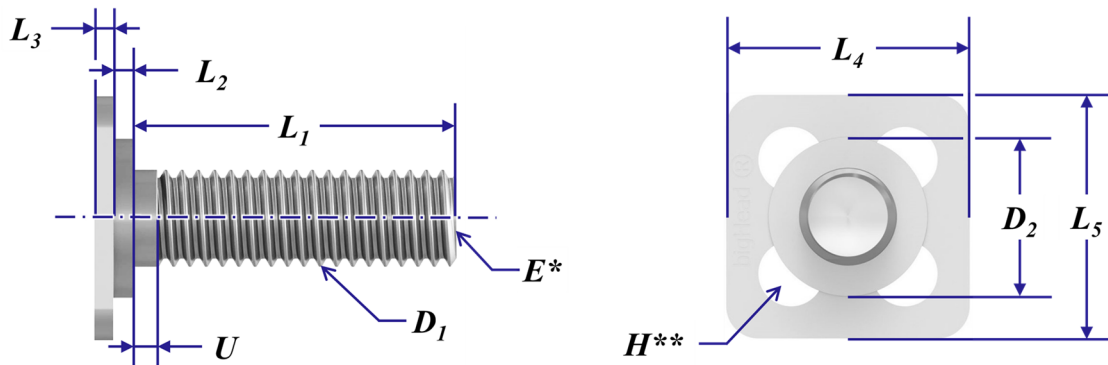

Product code	$D_1$	$D_2$ ( $\emptyset$ )	$L_1$	$L_2$	$L_3$	$L_4$	$L_5$	$U$	Typical min. weight (g)
M1 B15 M4 HT	M4 x 0.70	8.3	Nominal thread length value	1.2	1.2	15	15	1.0	3
M1 B15 M5 HT	M5 x 0.80	9.8		1.2	1.2	15	15	1.2	4
M1 B15 M6 HT	M6 x 1.00	9.8		1.2	1.2	15	15	1.5	5

**Common to all:**

Thread class: 6g post finish

$E^*$  - ISO 4753 "RL" as rolled end-form

$H^{**}$  - 4 perforation holes, equally spaced square array

**Design & application guidance**

Thread size	Tightening torque	Loadability (Fixing)	Loadability (Weld)	Clearance holes
	Max. recommended tightening torque (Nm)	Max. tensile load or assembly preload (kN)	Max. tensile load or assembly preload (kN)	Max. recommended clearance hole size (mm)
M4	3.2	5.4	2.7	4.5
M5	7.0	8.0	2.9	5.5
M6	9.8	8.6	2.9	6.6
	<p><i>Valid only for fixing load condition and system thread friction coefficient of 0.14.</i></p> <p><i>For guidance only - always perform suitable torque/ preload calculation for the intended application/ assembly design, and/ or validate tightening torque values by appropriate applications testing.</i></p>	<p>Fixing load limit (FLL):</p> <p><i>To avoid failure of the bigHead fastener, do not exceed stated loadability limits during in-service mechanical loading or assembly preloading.</i></p>	<p>Weld load limit (WLL):</p> <p><i>bigHead is not liable for failures arising from excessive tensile loading or assembly preloading of their products.</i></p>	<p>ISO 273 "medium" clearance hole basis.</p>

**Please contact bigHead for further guidance if you are unsure about these topics.**

## Disclaimer

---

The information within this document is for guidance purposes only and does not constitute a guarantee or warranty of any kind.

bigHead cannot accept liability for performance arising from use of these products.

Always perform appropriate testing and evaluation to determine application suitability.

Illustrations and diagrams are for illustrative purposes only and may differ from actual products.

## Further information & contact details

---

For further information about these products, or for technical support inquiries, please contact us:

[www.bighead.co.uk/the-techub/](http://www.bighead.co.uk/the-techub/)

[TecH@bighead.co.uk](mailto:TecH@bighead.co.uk)

+44 (0)1202 583 696

**bigHead Bonding Fasteners Ltd**

Unit 1, Black Moor Business Park  
36A Black Moor Road  
Ebblake Industrial Estate  
Verwood  
Dorset  
United Kingdom  
BH31 6BB